

# Specification/Data sheet


## UltraVent XS 6 2/3 E



Item number: 60.7X.XX

### Variants

- 60.73.865: UltraVent XS 6 2/3 E
- 60.73.945: Combi-Duo adapter kit UltraVent XS 6 2/3 E
- 60.73.943: UltraVent XS 6 2/3 E + Combi-Duo adapter kit UltraVent XS 6 2/3 E

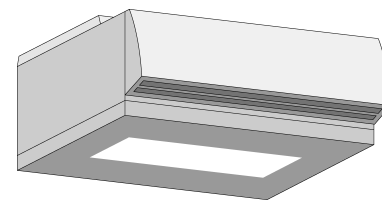

### Description

- The condensation technology the UltraVent® captures and dissipates steam in the form of condensate. There is no need for complicated and expensive installations to remove exhaust air. Installation is simple and it can be retrofitted at any time. There is no need for a connection to the outside.

### Technical Information

- Ratings: 230V 1 NAC 50/60 HZ
- Connected load: 140 W
- Extraction power: 560 m<sup>3</sup>/h
- Operating noise level 1: 41 dBA
- Operating noise level 2: 57 dBA
- Width: 25 7/8" (657 mm)
- Height: 9 1/2" (240 mm)
- Depth: 22 3/4" (580 mm)
- Weight: 55 lbs (25,5 kg)
- Certifications: VDE (IEC) EN 60335-2-99, NSF, RCM, EMC

### Equipment

- Easy-to-clean grease filter (CNS), dishwasher-safe
- High extraction power
- Proximity door contact switch
- Automatic increase of extraction power when cooking chamber door is opened
- Waste water discharge through the unit, no additional discharge required

### Material

- Stainless steel (CNS 1.4301)

### Note

- The local standards and regulations for ventilation systems must be adhered to.
- The UltraVent® XS condensation hood can be used for right and left hand door units. Supplied with installation options for both variants.

