

# RACK OVENS

## V-SERIES – RACK OVEN

The V-Series is a reliable, powerful and safe oven that is easy to use. The series has three basic sizes, with space for up to three racks in the oven chamber. The oven provides almost unlimited possibilities for professional baking and can be supplied with many different accessories and custom features.

### FEATURES AND BENEFITS

Equipped with our Increased Baking Surface system.  
*Provides quick, even and economical baking.*

The SD-Touch panel comes as standard.  
*Simple, logical, programmable and effective oven use.*

Cascad steam system quickly provides powerful and extra-clean steam.  
*Heat and steam are evenly spread quickly within the oven leaving the system with a short recovery period.*

Powerful insulation.  
*Traps heat inside the oven, leading to a better work environment at the bakery.*

Inside and outside of the oven are made of strong stainless steel.  
*Sustainable material that makes the oven last longer. Easy to keep clean.*

Automatic rotation stop for racks.  
*Once baking time is complete, the rack rotates to the unloading position once the door handle is lifted.*

Three basic sizes.  
*Can be adapted to most bakeries.*

Effective heat exchange in the oil and gas oven.  
*High efficiency and low heating costs.*

Right-hand hinged door with double glazed window.  
*Easy to open and supervise.*

Includes suspension hook  
*Simplifies oven cleaning.*

Utility holder (standard).  
*Perfect storage for knives and gloves and more.*

### OPTIONS

Rotating platform s/s, max 600 kg.

Heavy duty platform, max 800 kg.

Automatic rack lifting device, max 450 kg.

Large window in door.

Canopy.

Canopy with exhaust fan.

Insulated floor V30, V31, V32.

Insulated floor V40, V41, V42.

Insulated floor V50, V51, V52.

Left hand hinged door.

AES – Automatic Evacuation System.

Frequency converter for fan.

Fully assembled oven.

Water Filter.

Sveba Connect - Cloud Solution.



V40MA



EASY TO INSTALL - FULLY ASSEMBLED OVEN

UTILITY HOLDER COMES AS STANDARD

DUAL LOCKING PREVENTS HEAT LEAKAGE.

WEEK TIMER AS STANDARD

PATENTED IBS ROTATION SYSTEM

PATENTED CASCAD SYSTEM

SPRING-LOADED HINGES - KEEPS THE DOOR OPENED

IMPROVED LOCKING MECHANISM


ROBUST HEAT EXCHANGER

### TECHNICAL

MODEL	V40MA
HEATING POWER	64-72-80-88-95 kW
MAX TRAY SIZE	2 x 457 x 762 mm*
MAX DIAGONAL RACK	1300 mm
MAX RACK HEIGHT: - PLATFORM - HOOK	1815 mm 1880 mm

\* Inches: 18" x 30".

### MEASUREMENTS, EXTERNAL

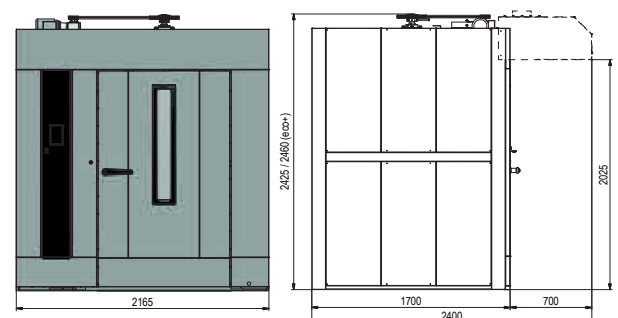

V40MA