




# TINA

## THAWING CABINET

Introducing the new Tina, which guarantees a more efficient, controlled and gentle food management process – from freeze to defrost. The patented defrosting technique integrated into the cabinet has evolved using the latest technology to ensure a quick and secure defrosting process with the highest food quality.



| TINA THAWING CABINET                   | Exclusive LAND   |   | Marine USPH   |   |
|--|--|---|---|---|
| Model                                  | H700EL   | H1200MEL  | H700MUSPH   | H1200MMUSPH   |
| Series                                 | IPINIUM TINA THAWING CABINET   | IPINIUM TINA THAWING CABINET  | IPINIUM TINA THAWING CABINET USPH   | IPINIUM TINA THAWING CABINET USPH   |
| Category                               |  |   | Marine & Offshore, USPH   | Marine & Offshore, USPH   |
| Including accessories                  | Right hand hinged door<br>Trolley 1/1 for Tina 700<br>14 baskets for large items gn 1/1                  | Right hand hinged door<br>Trolley 2/1 for Tina 1200<br>14 baskets for large items gn 2/1        | Right hand hinged door<br>Trolley 1/1 for Tina 700,<br>14 baskets for large items gn 1/1        | Right hand hinged door<br>Trolley 2/1 for Tina 1200<br>14 baskets for large items gn 2/1        |
| Interior                               | GN1/1-Trolley  | GN2/1-Trolley / 2xGN1/1-Trolley   | GN1/1-Trolley   | GN2/1-Trolley / 2xGN1/1-Trolley   |
| Overall dimensions,<br>W x D x H in mm | 811 x 850 x 2050<br>811 x 850 x 2212 with built-in compressor  | 1131 x 850 x 2050<br>1131 x 850 x 2212 with built-in compressor                                 | 811 x 850 x 2050<br>811 x 850 x 2212 with built-in compressor                                   | 1131 x 850 x 2050<br>1131 x 850 x 2212 with built-in compressor                                 |
| Weight                                 | 280 kg   | 330 kg  | 280 kg  | 330 kg  |
| Weight, packed                         | 300 kg   | 350 kg  | 300 kg  | 350 kg  |
| Volume                                 | 811x850x2100=1,45 m3   | 1131x850x2100=2 m3  | 811x850x2100=1,45 m3  | 1131x850x2100=2 m3  |
| Volume, packed                         | 1000x1000x2300=2,3 m3  | 1300x1000x2300=3 m3   | 1000x1000x2300=2,3 m3   | 1300x1000x2300=3 m3   |
| Cooling system                         | Central cooling  | Central cooling   | Central cooling   | Central cooling   |
| Refrigerant standard                   | R-134  | R-134   | R-134   | R-134   |
| Cooling capacity                       | 1,0kW / -10°C  | 1,5kW / -10°C   | 1,0kW / -10°C   | 1,5kW / -10°C   |
| Electric connection                    | 3x400V/10A/50Hz  | 3x400V/10A/50Hz   | 3x440V/10A/60Hz   | 3x440V/10A/60Hz   |
| Wattage (W)                            | 4400   | 4400  | 4400  | 4400  |
| Control                                | 7" Multi-touch panel   | 7" Multi-touch panel  | 7" Multi-touch panel  | 7" Multi-touch panel  |
| Water connection                       | G15  | G15   | G20 / 3/4"  | G20 / 3/4"  |
| Back vent                              | No   | No  | Yes   | Yes   |
| Drain connection                       | Front draining   | Front draining  | Front draining  | Front draining  |
| Temperature range                      | +2 to +8 °C  | +2 to +8 °C   | +2 to +8 °C   | +2 to +8 °C   |
| Ambient temperature                    | +10 to +32 °C  | +10 to +32 °C   | +10 to +32 °C   | +10 to +32 °C   |
| Material                               | Stainless steel 1.4301   | Stainless steel 1.4301  | Stainless steel 1.4301  | Stainless steel 1.4301  |
| Enclosure class front                  | IP44   | IP44  | IP44  | IP44  |
| Enclosure class top                    | IP20   | IP20  | IP20  | IP20  |
| Optional extras                        | Coolant Adaption<br>Refrigerant<br>Built-in compressor<br>Left hand hinged door<br>Electrical Connection | Coolant<br>Refrigerant<br>Built-in compressor<br>Left hand hinged door<br>Electrical Connection | Coolant<br>Refrigerant<br>Built-in compressor<br>Left hand hinged door<br>Electrical Connection | Coolant<br>Refrigerant<br>Built-in compressor<br>Left hand hinged door<br>Electrical Connection |

**7" MULTI-TOUCH**

Easy-to-use control panel. You only need to choose which type of product to defrost and the cabinet takes care of the rest for you.



**COLD STORAGE**

After your products are defrosted the cabinet then provides chilled storage.

**SSD-RELAY**

Precise temperatures and long-life span, thanks to the SSD-RELAYs that regulate the temperature in the cabinet.

**HYGENIC MOISTURE GENERATION**

An advanced self-cleaning moisture generation. Easy maintenance from the front.


**OUR BRAND-NEW CONTROL PANEL TAKES SIMPLICITY TO THE NEXT LEVEL. YOU NO LONGER NEED TO BE A TECHNICAL EXPERT TO ACHIEVE AN EFFECTIVE AND SAFE DEFROST.**



Quick and easy choices



With clear options to start the process

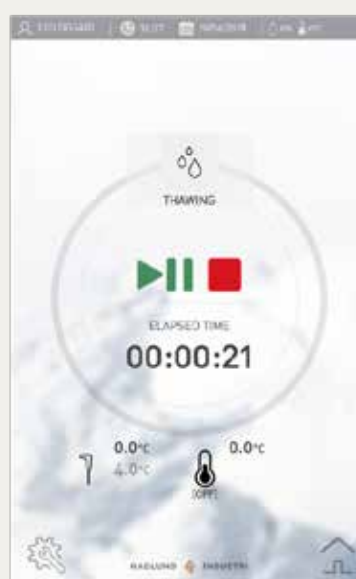

Drift view. We only show the necessary information in drift view mode